


# RUNNING HINTS IN PICTURES

## No. 34


### How to keep sidescreens in condition




1.—If at any time it is found difficult to register the pegs of the screen with their respective sockets—

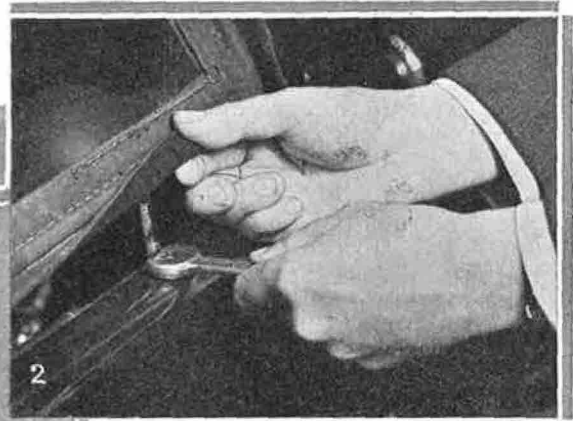


2.—the latter, having their holes disposed eccentrically, may be turned with a small spanner to the required position.

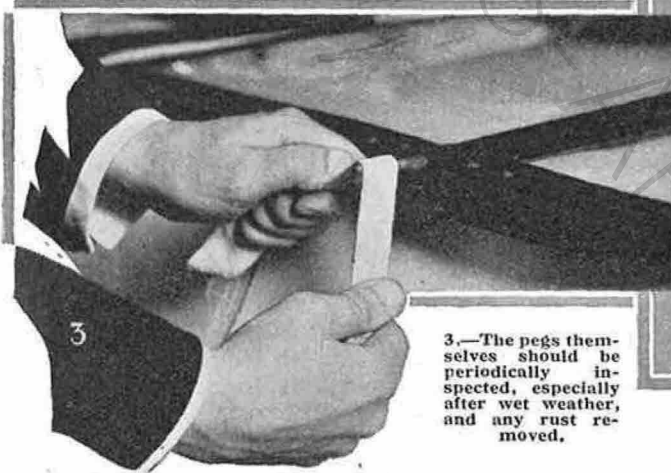

3.—The pegs themselves should be periodically inspected, especially after wet weather, and any rust removed.

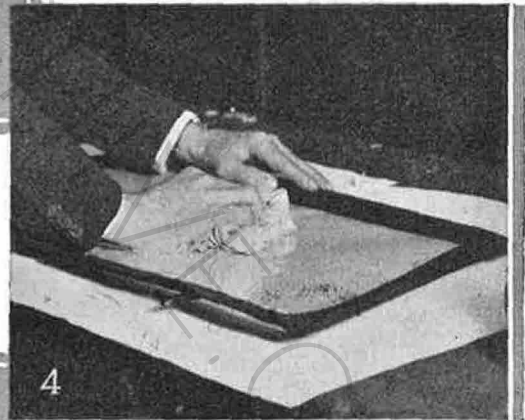

4.—When cleaning celluloid windows it is advisable, first of all, to remove all dust and grit with a clean soft rag.

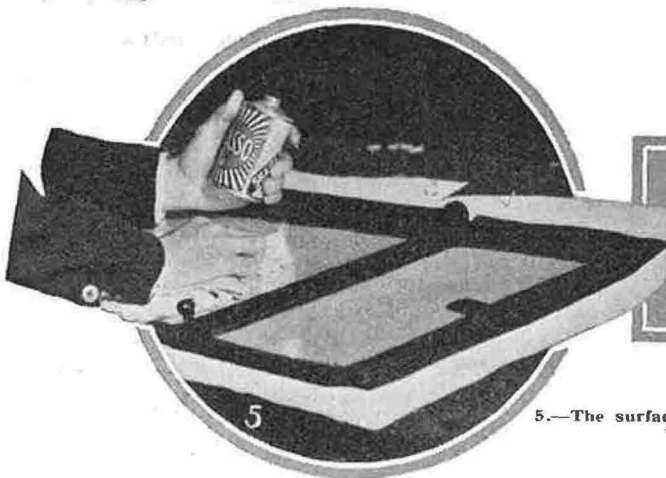

5.—The surface may then be given a clean and clear finish with a good liquid metal polish.